

F119 Design CE

DESIGN ACTIVE HEAT CONVECTOR WITH HIGH-PRECISION ELECTRONIC THERMOSTAT



+ PRODUCT

COMFORT

- Fast heating thanks to an efficient heat distribution on the appliance surface
- Sheathed heating element with an aluminium diffuser
- Ultimate safety due to Class II, IP 24 protection and dual electric insulation
- Anti-tilt system and automatic overheating safety device

SAVINGS

- High-precision electronic thermostat
- Up to 15% energy savings*
- ErP-compliant

USER-FRIENDLINESS

- 5 modes: Comfort, Eco, Anti-frost, Off, Programme
- Mode-setting cursor and control knob
- Easy to install: H-shaped vertical support
- Models with plug and standing kit**


DESIGN

- High-end modern design
- Stamped front air outlet
- Colour: White (RAL 9016)

In order to be ErP-compliant/CE, F119 Design CE (fix models) must be installed with a centralised weekly programming.

ACTIVE HEAT CONVECTOR

500 TO 2500 W



Model available***



Energy savings




Control knob + cursor



Heating element type

F119 Design CE

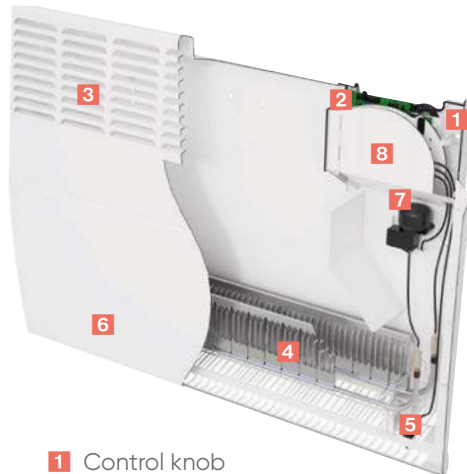


- 1 Control knob
- 2 Mode-setting cursor
- 3 Air outlet
- 4 Sheathed heating element with aluminium diffuser
- 5 Room temperature sensor
- 6 Front panel
- 7 Anti-tilt system
- 8 Overheating safety device



- 1 Temperature-setting knob
- 2 Mode-setting cursor (Shutdown, Anti-frost, Programming, Comfort, Eco)
- 3 Heating light indicator

INSTALLATION DIMENSIONS

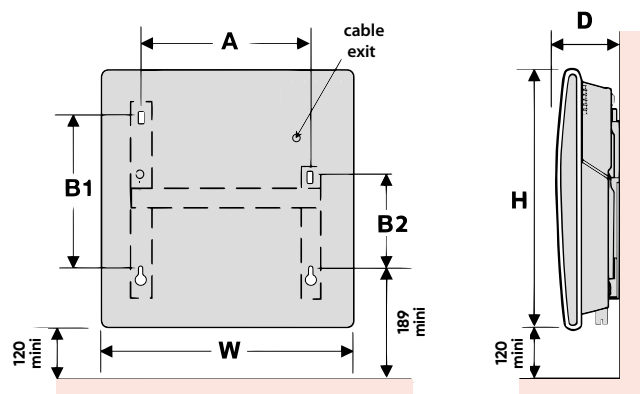

TECHNICAL DATA

OUTPUT (W)	DIMENSIONS (mm)						NET WEIGHT (Kg)
	WIDTH (W)	HEIGHT (H)	DEPTH (D)	A	B1	B2	
500	391	461	114	122	256	158	3.1
750	391	461	114	122	256	158	3.1
1000	465	461	114	196	256	158	3.5
1500	613	461	114	344	256	158	4.4
2000	761	461	114	492	256	158	5.3
2500	909	461	114	640	256	158	6.2

CE - Classe II - IP 24